



**ADVANCED
General Certificate of Education
2018**

Mathematics
Assessment Unit M4
assessing
Module M4: Mechanics 4
[AMM41]

MONDAY 25 JUNE, MORNING

**MARK
SCHEME**

GCE ADVANCED/ADVANCED SUBSIDIARY (AS) MATHEMATICS

Introduction

The mark scheme normally provides the most popular solution to each question. Other solutions given by candidates are evaluated and credit given as appropriate; these alternative methods are not usually illustrated in the published mark scheme.

The marks awarded for each question are shown in the right-hand column and they are prefixed by the letters **M**, **W** and **MW** as appropriate. The key to the mark scheme is given below:

M indicates marks for correct method.

W indicates marks for working.

MW indicates marks for combined method and working.

The solution to a question gains marks for correct method and marks for an accurate working based on this method. Where the method is not correct no marks can be given.

A later part of a question may require a candidate to use an answer obtained from an earlier part of the same question. A candidate who gets the wrong answer to the earlier part and goes on to the later part is naturally unaware that the wrong data is being used and is actually undertaking the solution of a parallel problem from the point at which the error occurred. If such a candidate continues to apply correct method, then the candidate's individual working must be followed through from the error. If no further errors are made, then the candidate is penalised only for the initial error. Solutions containing two or more working or transcription errors are treated in the same way. This process is usually referred to as "follow-through marking" and allows a candidate to gain credit for that part of a solution which follows a working or transcription error.

Positive marking:


It is our intention to reward candidates for any demonstration of relevant knowledge, skills or understanding. For this reason we adopt a policy of **following through** their answers, that is, having penalised a candidate for an error, we mark the succeeding parts of the question using the candidate's value or answers and award marks accordingly.

Some common examples of this occur in the following cases:

- (a) a numerical error in one entry in a table of values might lead to several answers being incorrect, but these might not be essentially separate errors;
- (b) readings taken from candidates' inaccurate graphs may not agree with the answers expected but might be consistent with the graphs drawn.

When the candidate misreads a question in such a way as to make the question easier only a proportion of the marks will be available (based on the professional judgement of the examining team).

1

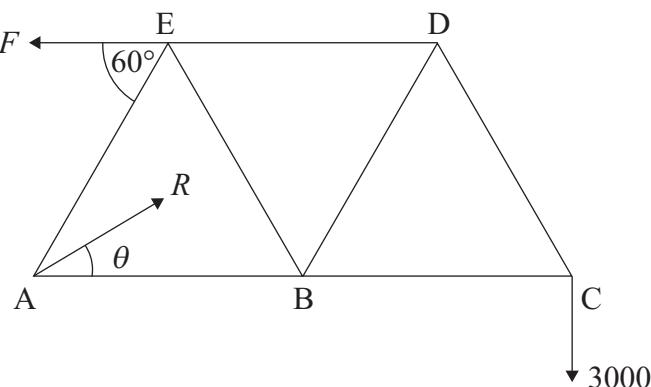

AVAILABLE MARKS

(i) $\curvearrowright A: 3000 \times 8 - F \times 4 \sin 60^\circ = 0$
 $F = 4000\sqrt{3} \text{ N}$
 $(= 6930 \text{ N})$

M1 W1
W1

(ii) $\rightarrow: R \cos \theta = 4000\sqrt{3}$
 $\uparrow: R \sin \theta = 3000$


M1 W1
MW1

$$|R| = \sqrt{(4000\sqrt{3})^2 + 3000^2}$$

$$= 7550 \text{ N}$$

M1
W1

(iii) at C:



M1


$$\uparrow: T_1 \sin 60^\circ = 3000$$

$$T_1 = 2000\sqrt{3} \text{ N}$$

$$\approx 3460 \text{ N}$$

M1
W1

at D:



$$\nwarrow: T_3 \cos 30^\circ = T_1 \cos 30^\circ$$


$$T_3 = 2000\sqrt{3} \text{ N}$$

$$\text{tension}$$

M1 W1
W1
M1

15

2 (i)

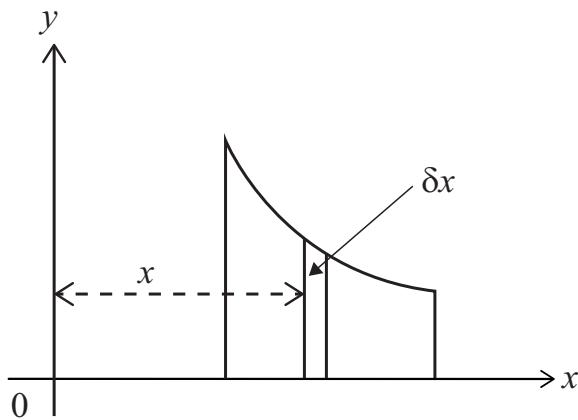

AVAILABLE MARKS

$$\text{mass of strip} = \delta m = y \times \delta x \times 1$$

$$\delta m = \frac{4}{x^2} \delta x$$

MW1

$$\text{moment about } x\text{-axis} = \delta M_x = \frac{y}{2} \times \delta m$$

M1

$$\delta M_x = \frac{8}{x^4} \delta x$$

MW1

$$M_x = \int_1^2 8x^{-4} dx$$

MW1

$$= \left[-\frac{8}{3x^3} \right]_1^2$$

$$= \left[-\frac{1}{3} - \left(-\frac{8}{3} \right) \right] = \frac{7}{3}$$

MW1

$$M_x = 2 \times 1 \times Y = \frac{7}{3}$$

M1

$$Y = \frac{7}{6}$$

W1

$$(ii) \text{ moment about } x\text{-axis} = \delta M_y = x \times \delta m$$

$$\delta M_y = \frac{4}{x} \delta x$$

MW1

$$M_y = \int_1^2 \frac{4}{x} dx$$

$$= [4 \ln x]_1^2$$


$$= 4 \ln 2 - 0$$

MW1

$$M_y = 2 \times 1 \times X = 4 \ln 2$$

$$\begin{aligned} X &= 2 \ln 2 \\ &= \ln 4 \end{aligned}$$

MW1

AVAILABLE
MARKS

$$PG = X - 1 = \ln 4 - 1$$

MW1

$$AP = 4 - \frac{7}{6} = \frac{17}{6}$$

MW1


$$\tan \alpha = \frac{\ln 4 - 1}{\frac{17}{6}}$$

M1

$$\alpha = 7.76^\circ$$

W1

14

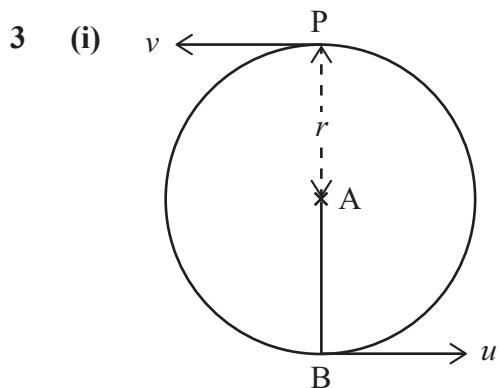

Let the speed of the particle at the highest point, P, be v

M1

Conservation of energy:

MW3

$$\frac{1}{2}mv^2 + 2mgr = \frac{1}{2}mu^2$$

$$v^2 = u^2 - 4gr$$

W1

If $v > 0$ then $u > 2\sqrt{gr}$

MW1

(ii) If the tension in the rod is zero when the particle reaches P:

$$\downarrow: mg = m \frac{v^2}{r}$$

$$v^2 = gr$$

M2 W1

$$\therefore u^2 - 4gr = gr$$

$$u = \sqrt{5gr}$$

MW1

W1

11

4 (i) Let $P = k L^\alpha D^\beta \rho^\gamma v^\delta$

M1

AVAILABLE MARKS

Using dimensions:

$$[MLT^{-2}] [L^{-2}] = [L]^\alpha [L]^\beta [ML^{-3}]^\gamma [LT^{-1}]^\delta$$

MW3

$$[ML^{-1}T^{-2}] = [M]^\gamma [L]^{\alpha + \beta - 3\gamma + \delta} [T]^{-\delta}$$

MW1

$$M: \gamma = 1$$

$$T: -\delta = -2 \text{ or } \delta = 2$$

$$L: \alpha + \beta - 3\gamma + \delta = -1$$

$$\alpha + \beta = -1 + 3 - 2 = 0$$

$$\beta = -\alpha$$

$$\text{We get } P = k \left(\frac{L}{D} \right)^\alpha \rho v^2$$

MW3

(ii) $P_2 = k \left(\frac{L}{D} \right)^\alpha \rho (2v)^2$

MW1

$$= 2^{\alpha+2} \times k \left(\frac{L}{D} \right)^\alpha \rho v^2$$


$$\therefore 8P = 2^{\alpha+2} \times P$$

W1

$$\alpha + 2 = 3 \text{ so } \alpha = 1$$

W1

11

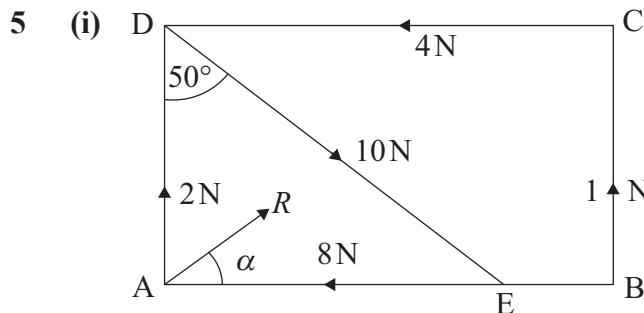

Let force R act at A at angle α to \overrightarrow{AB} as shown
Resultant force of this system is zero

M1

$$\rightarrow: R \cos \alpha - 4 - 8 + 10 \sin 50^\circ = 0$$

M1

$$R \cos \alpha = 4.34 \text{ N}$$

W1

$$\uparrow: R \sin \alpha + 2 + 1 - 10 \cos 50^\circ = 0$$

MW1

$$R \sin \alpha = 3.43 \text{ N}$$

$$|R| = \sqrt{(4.34)^2 + 3.43^2} \\ = 5.53 \text{ N}$$

M1

W1

$$\tan \alpha = \frac{3.43}{4.34}$$

M1

$$\alpha = 38.3^\circ$$

W1

(ii)  $M = -1 \times 10 + 8 \times 6 - 4.34 \times 6 \\ = 12 \text{ Nm}$


M1 W1

W1

11

6 (i)

AVAILABLE MARKS

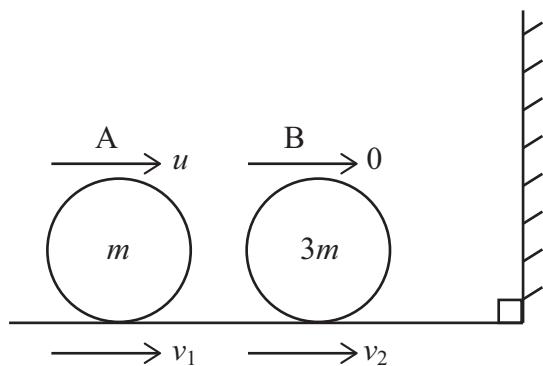

$$mv_1 + 3mv_2 = mu$$

$$v_1 + 3v_2 = u \quad \text{--- (1)}$$

M1 W1

$$v_2 - v_1 = -e(0 - u) = eu \quad \text{--- (2)}$$

M1 W1

$$(1) - 3 \times (2): 4v_1 = u(1 - 3e)$$


MW1

Given $v_1 < 0$ then $1 - 3e < 0$

$$e > \frac{1}{3}$$

MW1

(ii)

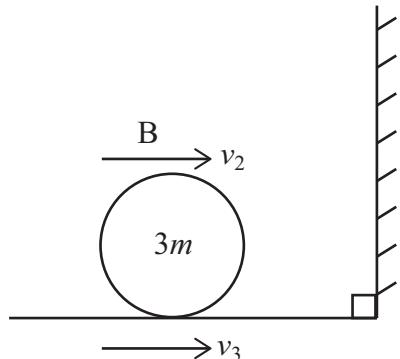

$$v_3 = -ev_2 = -e(v_1 + eu)$$

M1

$$v_3 = -e \left[\frac{1}{4}(1 - 3e)u + eu \right]$$


MW1

$$= -\frac{1}{4}e(1 + e)u$$

$$\text{speed} = \frac{eu(1 + e)}{4}$$

W1

(iii)

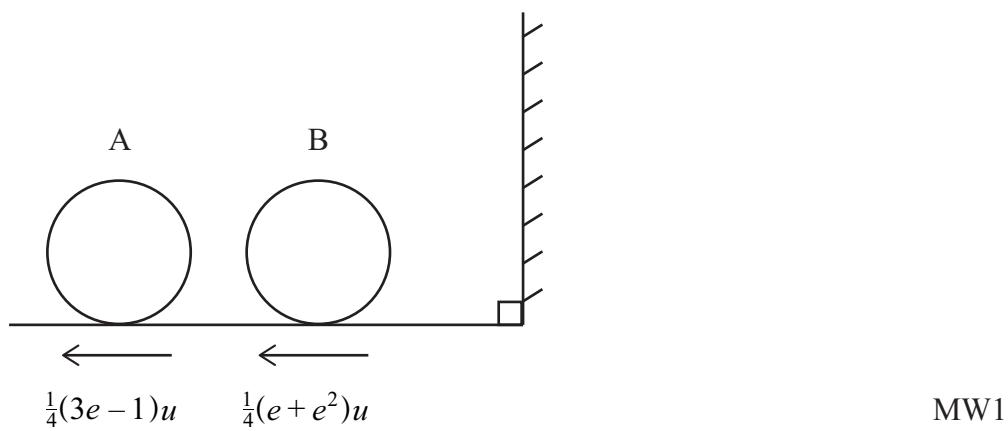

AVAILABLE MARKS

MW1

If B is to collide with A again then

$$\frac{1}{4}(e + e^2)u > \frac{1}{4}(3e - 1)u$$

M1

$$e + e^2 - 3e + 1 > 0$$

$$(e - 1)^2 > 0$$

$$e < 1$$

MW1

Range of values of e is

$$\frac{1}{3} < e < 1$$

MW1

13

Total**75**