



Cambridge Technicals

Engineering

Unit 3: Principles of mechanical engineering

Level 3 Cambridge Technical Certificate/Diploma in Engineering

05822 - 05825

Mark Scheme for June 2017

OCR (Oxford Cambridge and RSA) is a leading UK awarding body, providing a wide range of qualifications to meet the needs of candidates of all ages and abilities. OCR qualifications include AS/A Levels, Diplomas, GCSEs, Cambridge Nationals, Cambridge Technicals, Functional Skills, Key Skills, Entry Level qualifications, NVQs and vocational qualifications in areas such as IT, business, languages, teaching/training, administration and secretarial skills.

It is also responsible for developing new specifications to meet national requirements and the needs of students and teachers. OCR is a not-for-profit organisation; any surplus made is invested back into the establishment to help towards the development of qualifications and support, which keep pace with the changing needs of today's society.

This mark scheme is published as an aid to teachers and students, to indicate the requirements of the examination. It shows the basis on which marks were awarded by examiners. It does not indicate the details of the discussions which took place at an examiners' meeting before marking commenced.

All examiners are instructed that alternative correct answers and unexpected approaches in candidates' scripts must be given marks that fairly reflect the relevant knowledge and skills demonstrated.

Mark schemes should be read in conjunction with the published question papers and the report on the examination.

OCR will not enter into any discussion or correspondence in connection with this mark scheme.

© OCR 2017

Subject specific marking instructions

In all numerical calculation questions a correct response will gain all marks unless specified otherwise. You do not need to see all the workings if the answer is correct.

- In numerical calculation questions a correct response will gain all marks unless specified otherwise. You do not need to see all the workings if the answer is correct unless it is a ‘show that’ question.
- Numerical answers should be given to a minimum of 2 significant figures unless specified otherwise. There is usually no penalty for using more than 2 significant figures, but the answer given should equal the stated value when rounded to 2 significant figures.
- Numerical answers given as fractions will not be credited unless specified otherwise.
- Power of ten (POT) errors will lose a max of one mark per calculation.
- In calculation questions where one of the marks is awarded for substitution into the equation, POT errors can be ignored. There will be a penalty in subsequent marks for POT errors.
- Where there is a mark awarded for using a correct equation it can be seen or implied.

B marks: These are awarded as independent marks, which do not depend on other marks. For a **B**-mark to be scored, the point to which it refers must be seen specifically in the candidate’s answers.

M marks: These are method marks upon which **A**-marks (accuracy/answer marks) later depend. For an **M**-mark to be scored, the point to which it refers must be seen in the candidate’s answers. If a candidate fails to score a particular **M**-mark, then none of the dependent **A**-marks can be scored.

C marks: These are compensatory method marks which can be scored even if the points to which they refer are not written down by the candidate, providing subsequent working gives evidence that they must have known it. For example, if an equation carries a **C**-mark and the candidate does not write down the actual equation but does correct working which shows the candidate knew the equation, then the **C**-mark is given.

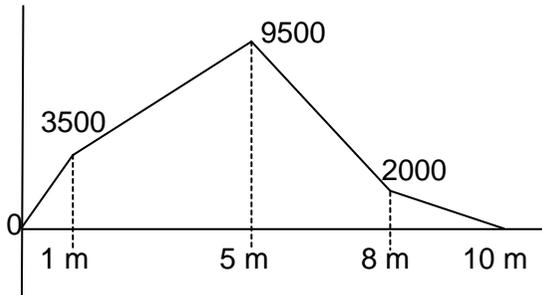
A marks: These are accuracy or answer marks, which either depend on an **M**-mark, or allow a **C**-mark to be scored.

Here is the mark scheme for this question paper.

Question		Answer/Indicative content	Mark	Guidance	
1	(a)	<p>Total area = 45500</p> <p>Application of second moment of area</p> $45500 \left(\begin{matrix} \bar{x} \\ \bar{y} \end{matrix} \right) = 15000 \left(\begin{matrix} 25 \\ 150 \end{matrix} \right) + 10500 \left(\begin{matrix} 125 \\ 265 \end{matrix} \right) + 20000 \left(\begin{matrix} 175 \\ 40 \end{matrix} \right)$ $45500 \left(\begin{matrix} \bar{x} \\ \bar{y} \end{matrix} \right) = \begin{matrix} 5187500 \\ 5832500 \end{matrix}$ <p>$\bar{x} = 114.0(mm)$ $\bar{y} = 128.19(mm)$</p>	<p>C1</p> <p>C2</p> <p>A1</p> <p>A1</p>	<p>Correct substitution seen or implied for second moment of area method. Allow ecf for area. 1 compensation mark available for \bar{x} and 1 compensation mark available for \bar{y} Candidates may have split shape up differently and so areas and centroid values will need checking.</p> <p>Allow ecf for incorrect area only Allow ecf for incorrect area only</p>	
1	(b)	(i)	(FOS = $240 \div 110 =$) 2.2 (2.18)	A1	
1		(ii)	There would be permanent/ plastic deformation (owtte).	A1	
1		(iii)	<p>Area = $\pi \times 22.5^2 = 1590.4\dots mm^2$ (or $0.00159 m^2$)</p> <p>(Shear stress =) $120/1590.4$</p> <p>= $0.07545 N/mm^2$ (or MPa) UNIT REQUIRED (OR $75451 N/m^2$ or Pa)</p>	<p>C1</p> <p>C1</p> <p>A1</p>	<p>Calculation of area</p> <p>Allow ecf for incorrect area</p> <p>Allow ecf for incorrect area Allow $0.076 N/mm^2$</p>
2	(a)	<ul style="list-style-type: none"> • Non-reversible direction of transmission wanted • Much smaller than using spur gears or equivalent • Input and output axes at 90 degrees 	A1	<p>Accept any valid reason Reason must be specific to this type of gear arrangement.</p>	
2	(b)	E.g. pliers, crowbar, jack for a car	A1	Accept any valid application. Accept see saw balance.	
2	(c)	(i)	(Effort = $392/1.95 =$) 201(N)	A1	
2	(c)	(ii)	(B= $1.2 \div 1.95 =$) 0.615 (m)	A1	
2	(c)	(iii)	(Mass = weight/g = $392/9.8 =$) 40(kg)	C1	Method mark for calculation of mass

Question			Answer/Indicative content	Mark	Guidance
			(Volume = mass/density = 40/7000 =) $5.714... \times 10^{-3} \text{ (m}^3\text{)}$	A1	Award 1 if volume calculated correctly using weight instead of mass (Answer of 0.056 seen) and previous mark not already awarded
2	(c)	(iv)	Area = volume/length = 0.01632... Radius = $\sqrt{\frac{\text{Area}}{\pi}}$ = 0.0721.. m (Diameter =) 0.1441 (m)	C1 A1	Allow ecf part iii) Accept answers between 0.07208 and 0.07211. Allow ecf part iii) only
2	(d)	(i)	(VR = (teeth in)/(teeth out) = 1.5) (teeth out = 24/1.5 =) 16	A1	
2	(d)	(ii)	Idler gear	A1	
2	(d)	(iii)	VR = (24/48)(48/T _C) = 1.5 (T _C = 24/1.5 =) 16	C1 A1	
2	(d)	(iv)	One mark from e.g.: <ul style="list-style-type: none"> • Less maintenance • No slipping (if compared with non-toothed belts) • Greater maximum torque transmission 	A1	Accept suitable alternative answers. Accept higher efficiency or higher accuracy. Advantage must be specific to this gear arrangement.
3	(a)	(i)	(P = Fv = 20 × 5 =) 100 (W)	A1	
3	(a)	(ii)	(E _k = (19.5 × 3 ²)/2 =) 87.75 (J)	A1	
3	(a)	(iii)	19.5 × 3 + 17.5 × 0 = 19.5v + 17.5 × 1 (v = (58.5 – 17.5)/19.5 =) 2.1026 (m s ⁻¹)	C1 A1	
3	(b)	(i)	Weight (of the ball)	A1	NOT mass of the ball. NOT gravity. Accept other reasonable answers e.g. mass of ball × g OR mg if seen force acting on the ball due to gravity etc
3	(b)	(ii)	(Net) horizontal force = 0.6 - 0.5cos10 / 0.1076	C1	

Question			Answer/Indicative content	Mark	Guidance
			(Net) vertical force = $0.5\sin 10 + 2.9 / 2.9896$ Res = $\sqrt{0.1076^2 + 2.9868^2}$ Res = 2.99 (N)	C1 C1 A1	Accept reasonable rounding (expect answers between 2.95 and 3.2)
3	(b)	(iii)	(A = $\Sigma F/m = 2.99/0.3 =$) 9.96 (m s ⁻²)	A1	Allow ecf part ii) Accept reasonable rounding [9.8,.... 10.2]
4	(i)		v = u + at 24.5 = 0 + 14a (a =) 1.75 (ms ⁻²)	C1 A1	Correct equation and correct substitution
	(ii)		R = 4000x9.8 / R = 39200 (F _{max} = $\mu R = 0.22 \times 39200 =$) 8624 (N)	C1 A1	
	(iii)		$\Sigma F = ma = 4000 \times 1.75$ F – 8624 = 4000 x 1.75 (F =) 15624 (N)	C1 C1 A1	Attempt to apply N2L with at least ‘ma’ calculation shown All elements of calculation correct including signs Allow ecf from part i) and ii)
5	(a)	(i)	E.g. wind loading on wall, cars bumper to bumper on a bridge, snow load on a roof	A1	Accept any sensible answer – must state what structure loading is acting upon (eg wall, bridge roof etc –)
5	(a)	(ii)	E.g. individual car or truck on a bridge, main load carried by a crane	A1	Accept any sensible answer – must state what structure the load is acting upon
5	(b)	(i)	2000 x 1 + 4000x5 = 1500x8 + 10R _b OR 10R _a + 1500x2 = 4000x5 + 2000x9 OR R _a + R _b = 4500 R _b = 1000(N) R _a = 3500(N)	C1 A1 A1	
5	(b)	(ii)	1000 x 5 + 1500x3 = 9500 Nm Or 3500x5 - 2000x4 = 9500 Nm	A1	Allow -9500

Question			Answer/Indicative content	Mark	Guidance
5	(b)	(iii)		C1 C1 C1 A1	Values of 0 (Nm) at 0m and 10m (or A and B shown) – only award for a BENDING MOMENT diagram. Value of 9500 (or ecf) seen at correct point on diagram (may be negative) Values of 3500 and 2000 shown at correct points on diagram (must have same sign as 9500). Diagram drawn and labelled correctly as shown
6	(a)		Horizontal equilibrium: $Q \sin 35 = 210$ $Q = 366.1 \text{ (N)}$ Vertical equilibrium: $P = Q \cos 35$ $P = 299.9 \text{ (N)}$	C1 A1 C1 A1	.
6	(b)		(For vertical equilibrium) $F = 10 + 20$ $F = 30 \text{ (N)}$ Correct moments equation (e.g. $F x + 8 \times 3 - 20 \times 10 = 0$) $(x = 276/30 =) 5.87 \text{ (m)}$	C1 A1 C3 A1	Award 1 mark for correct equation Award 3 marks for correct moments equation about any corner. Deduct 1 mark for each mistake.

OCR (Oxford Cambridge and RSA Examinations)
1 Hills Road
Cambridge
CB1 2EU

OCR Customer Contact Centre

Education and Learning

Telephone: 01223 553998

Facsimile: 01223 552627

Email: general.qualifications@ocr.org.uk

www.ocr.org.uk

For staff training purposes and as part of our quality assurance programme your call may be recorded or monitored

Oxford Cambridge and RSA Examinations
is a Company Limited by Guarantee
Registered in England
Registered Office; 1 Hills Road, Cambridge, CB1 2EU
Registered Company Number: 3484466
OCR is an exempt Charity

OCR (Oxford Cambridge and RSA Examinations)
Head office
Telephone: 01223 552552
Facsimile: 01223 552553

© OCR 2017

