

**OXFORD CAMBRIDGE AND RSA EXAMINATIONS
A LEVEL**

H446/02

COMPUTER SCIENCE

Algorithms and Programming

THURSDAY 22 JUNE 2017:

Morning

**TIME ALLOWED: 2 hours 30 minutes
plus your additional time allowance**

MODIFIED ENLARGED 24pt

First name		Last name	
-----------------------	--	----------------------	--

Centre number						Candidate number				
--------------------------	--	--	--	--	--	-----------------------------	--	--	--	--

DO NOT USE:

A calculator

READ INSTRUCTIONS OVERLEAF



INSTRUCTIONS

Use black ink.

Complete the boxes on the first page with your name, centre number and candidate number.

Answer ALL the questions.

Write your answer to each question in the space provided. Additional paper may be used if required but you must clearly show your candidate number, centre number and question number(s).

INFORMATION

The total mark for this paper is 140.

The marks for each question are shown in brackets [].

Quality of extended responses will be assessed in questions marked with an asterisk (*).

BLANK PAGE

Answer ALL the questions.

SECTION A

1 A programmer needs to sort an array of numeric data using an insertion sort.

(a) (i) The following, incomplete, algorithm performs an insertion sort.

Complete the algorithm opposite. [3]

```
procedure sortit(dataArray, lastIndex)
  for x = 1 to lastIndex
    currentData = dataArray[_____]
    position = x
    while (position > 0 AND
      dataArray[position - 1] > currentData)
      dataArray[position]
        = dataArray[_____]
      position = position - 1
    endwhile
    dataArray[position] = _____
  next x
endprocedure
```

(ii) Show how an insertion sort would sort the following data:

6	1	15	12	5	6	9
---	---	----	----	---	---	---

[6]

- (b) (i) Using Big-O notation state the best case complexity of insertion sort.**

_____ **[1]**

- (ii) Explain what your answer to part (b)(i) means.**

_____ **[3]**

(c*)The number of data items in the array is continually increasing.

Insertion sort has a worst case time complexity of $O(n^2)$ and space complexity of $O(1)$.

An alternative sorting algorithm that could be used is bubble sort which also has a worst case time complexity of $O(n^2)$ and space complexity of $O(1)$.

Briefly outline how the bubble sort algorithm works. Discuss the relationship between the complexities and the two sorting algorithms and justify which of the two algorithms is best suited to sorting the array. [9]

[illegible]

[illegible]

2 A programmer is developing an ordering system for a fast food restaurant. When a member of staff inputs an order, it is added to a linked list for completion by the chefs.

(a) Explain why a linked list is being used for the ordering system.

[2]

(b) Each element in a linked list has:

a pointer, `nodeNo`, which gives the number of that node

the order number, `orderNo`

a pointer, `next`, that points to the next node in the list

Fig. 2.1 shows the current contents of the linked list, orders.

FIG. 2.1

nodeNo	orderNo	next
0	154	1
1	157	2
2	155	3
3	156	∅

∅ represents a null pointer.

- (i) **Order 158 has been made, and needs adding to the end of the linked list.**

Add the order, 158, to the linked list as shown in Fig. 2.1. Show the contents of the linked list in the following table. [2]

nodeNo	orderNo	next

(ii) Order 159 has been made. This order has a high priority and needs to be the second order in the linked list.

Add the order, 159, to the original linked list as shown in Fig. 2.1. Show the contents of the linked list in the following table. [3]

nodeNo	orderNo	next

(c) The linked list is implemented using a 2D array, theOrders:

Row 0 stores orderNo

Row 1 stores next

The data now stored in theOrders is shown in Fig. 2.2.

FIG. 2.2

184	186	185	187
1	2	3	

theOrders [1 , 0] would return 1

The following algorithm is written:

```
procedure x()  
  finished = false  
  count = 0  
  while NOT(finished)  
    if theOrders[1,count] == null then  
      finished = true  
    else  
      output = theOrders[0,count]  
      print(output)  
      count = theOrders[1,count]  
    endif  
  endwhile  
  output = theOrders[0,count]  
  print(output)  
endprocedure
```

(i) Outline why `nodeNo` does not need to be stored in the array.

[1]

(ii) Complete the trace table below for procedure `x`, for the data shown in Fig. 2.2. [3]

<code>finished</code>	<code>count</code>	<code>output</code>

(iii) Describe the purpose of procedure x.

[2]

- (iv) A new order, 190, is to be added to theOrders. It needs to be the third element in the list.
The current contents of the array are repeated here for reference:

184	186	185	187		
1	2	3			

Describe how the new order, 190, can be added to the array, so the linked list is read in the correct order, without rearranging the array elements.

[4]

-
-
- (d) The user needs to be able to search for, and find, a specific order number.**

State an appropriate search algorithm that could be used, and justify your choice against an alternative Search algorithm.

Appropriate Search Algorithm

Justification _____

[3]

(e) The programmer is writing the program using an IDE.

Identify THREE features of an IDE that the programmer would use when writing the code and describe how the features benefit the programmer. [6]

1 _____

2 _____

(f*) The programmer is considering using concurrent programming.

Discuss how concurrent programming can be applied to the food ordering system and the benefits and limitations of doing so.
[9]

[illegible]

- 3 An encryption routine reads a line of text from a file, reverses the order of the characters in the string and subtracts 10 from the ASCII value of each letter, then saves the new string into the same file.**

The program is split into sub-procedures. Three sub-procedures are described as follows:

Read string from file

Push each character of the string onto a stack

Read and encrypt each character message

- (a) (i) Identify ONE further sub-procedure that could be used in the program.**

_____ [1]

(ii) Describe TWO advantages of splitting the problem into sub-procedures.

1 _____

2 _____

[4]

(b) A function, readMessage:

takes the file name as a parameter

reads and returns the line of text

**Complete the pseudocode algorithm
opposite for readMessage: [4]**

```
function _____(fileName)
    messageFile = openRead(_____)
    message = messageFile.readLine()
    messageFile. _____
    return _____
endfunction
```

(c) A function, `push`, can be used to add a character to a stack. For example:

```
theStack.push("H")
```

places the character `H` onto the stack, `theStack`.

A procedure, `pushToStack`, takes a string as a parameter and pushes each character of the message onto the stack, `messageStack`.

Complete the procedure opposite.

Add comments to explain how your code works.

```
procedure  
pushToStack (message)
```


```
endprocedure [5]
```

(d) Describe the steps that the program would have to take in order to encrypt the characters stored in the stack, and save them in a single variable.

[5]

- 4 A data structure is shown below in Fig. 4.1.

FIG. 4.1

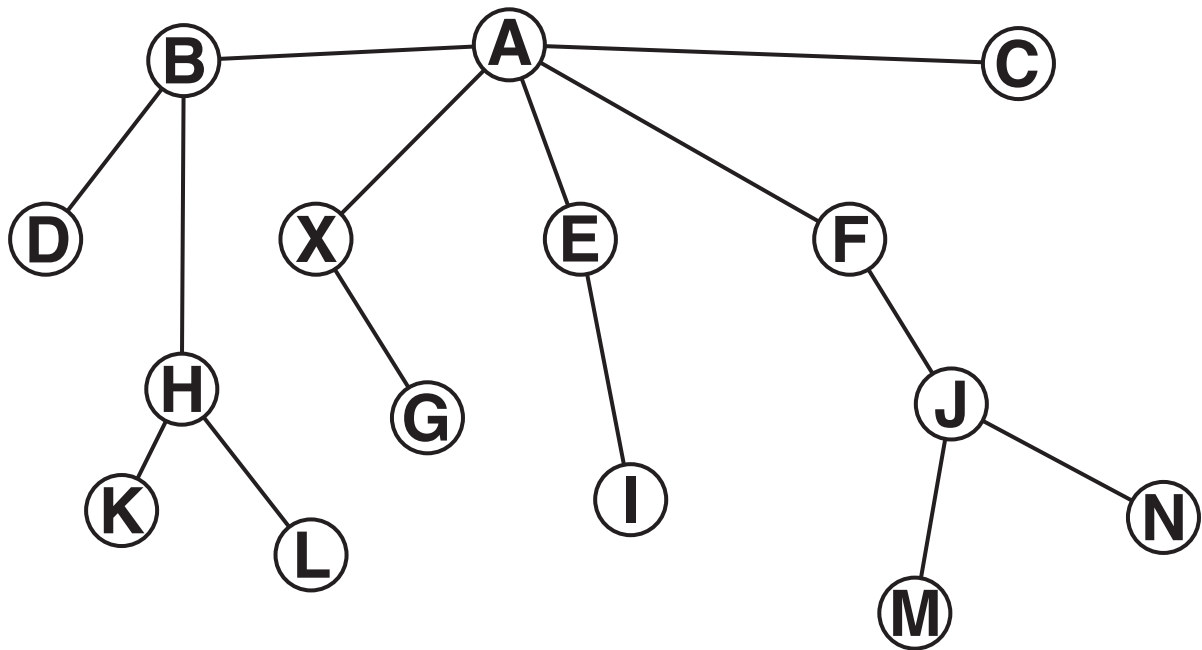

- (a) Identify the data structure shown in Fig. 4.1.

_____ [1]

(i) Explain the difference between a depth-first (post-order) and breadth-first traversal.

[4]

(ii) Show how a depth-first (post-order) traversal would find the path between node A and node X for the structure shown in Fig. 4.1. [6]

(iii) Explain how you used backtracking in your answer to part (b)(ii).

[3]

BLANK PAGE

TURN OVER FOR QUESTION 5

5 A recursive function, calculate, is shown below:

```
01 function calculate(num1, num2)
02     if num1 == num2 then
03         return num1
04     elseif num1 < num2
05         return calculate(num1, (num2-num1))
06     else
07         return calculate(num2, num1-num2))
08     endif
09 endfunction
```

(a) Identify the lines where recursion is used.

_____ **[1]**

(b) Trace the algorithm below, showing the steps and result when the following line is run: [5]

```
print (calculate (4 ,10) )
```

[illegible]

SECTION B

Answer ALL questions.

- 6 A software developer is creating a Virtual Pet game.**

The user can choose the type of animal they would like as their pet, give it a name and then they are responsible for caring for that animal. The user will need to feed, play with, and educate their pet.

The aim is to keep the animal alive and happy, for example if the animal is not fed over a set period of time then the pet will die.

The game tells the user how hungry or bored the animal is as a percentage (%) and the animal's intelligence is ranked as a number between 0 and 150 (inclusive).

Hunger and boredom increase by 1% with every tick of a timer.

When the feed option is selected, hunger is reduced to 0.

When the play option is selected, bored is reduced to 0.

When the read option is selected, the intelligence is increased by 0.6% of its current value.

An example of the game is shown:

FIG. 1.1

**What type of pet would you like?
Fox or Elephant?**

Fox

**What would you like to name your
Fox?**

Joanne

Joanne's stats are

Hunger: 56%

Bored: 85%

Intelligence: 20

**What would you like to do with
your pet? Play, Read or Feed?**

(a) Identify THREE inputs that the user will have to enter to start, and/or play the game.

1 _____

2 _____

3 _____

[3]


(b) The developer is using decomposition to design the game.

(i) Describe the process of decomposition.

[2]

(ii) The developer has produced the structure diagram opposite for the game:

Complete the structure diagram for the Virtual Pet game by filling in the empty boxes. [6]

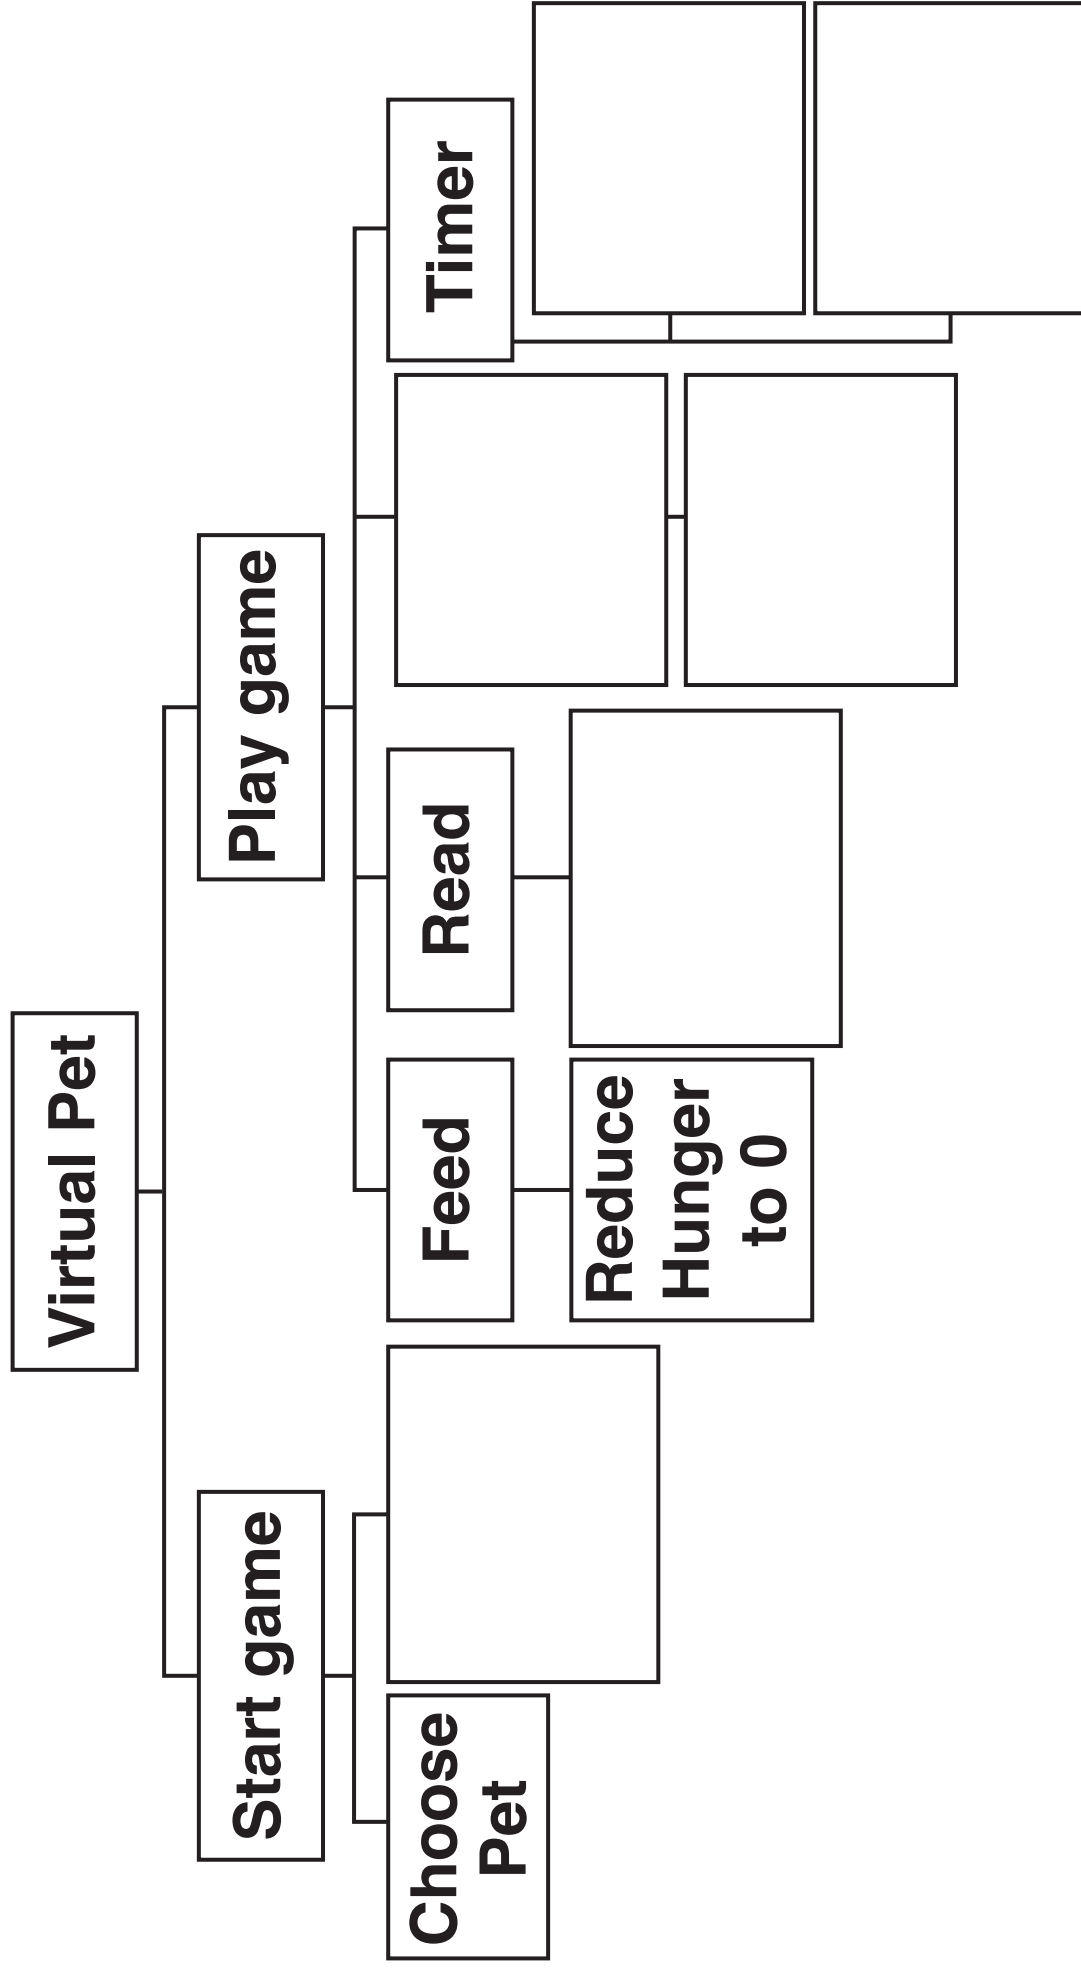

(c) The developer needs to write procedures for the options play and read. Each of the options changes its corresponding value, and outputs the results to the screen.

(i) Write a procedure, using pseudocode, to reset bored and output the new value in an appropriate message.

[3]

- (ii) Write a procedure, using pseudocode, to increase intelligence by 0.6% and output the new intelligence in an appropriate message.

[3]

(d) The developer is extending the game to allow users to have multiple pets of different types. The developer has written a class, `Pet`.

The attributes and methods in the class are described in the table:

Identifier	Attribute/ Method	Description
<code>petName</code>	Attribute	Stores the pet's name
<code>bored</code>	Attribute	Stores the % bored
<code>hunger</code>	Attribute	Stores the % hunger
<code>intelligence</code>	Attribute	Stores the intelligence
<code>type</code>	Attribute	Stores the type of animal
<code>new</code>	Method	Creates a new instance of <code>pet</code>

Identifier	Attribute/ Method	Description
feed	Method	Reduces hunger to 0 and outputs hunger
play	Method	Reduces bored to 0 and outputs bored
read	Method	Increases intelligence by a set value
outputGreeting	Method	Outputs a message to the user

**Part of the class declaration is
given:**

```

class Pet
    private petName
    private bored
    private hunger
    private intelligence
    private type

```

...

...

- (i) After a user enters the pet name, and chooses a type, the constructor method of `Pet` is called to create a new instance. The method needs to set `petName`, as well as `hunger`, `bored` and `intelligence` to starting values of 0.

Write, using pseudocode, the constructor method for this class.

[4]

(ii) Write a line of code that creates a new instance of `Pet` for a Tiger called “Springy”.

_____ **[2]**

(iii) The method outputGreeting for the superclass is written as follows:

```
public procedure outputGreeting()  
    print("Hello, I'm " + petName  
        + ", I'm a " + type)  
endprocedure
```

A class is needed for Tiger. The class needs to:

inherit the methods and attributes from pet

in the constructor, set type to Tiger, intelligence to 10, hunger to 50 and bored to 10

extend the method outputGreeting, by outputting an additional line that says "I like to eat meat and roar"

[illegible]

(e*)The developer made use of abstraction when creating the Virtual Pet game.

Discuss the need for and purpose of abstraction and how abstraction will be used in the development of the game. [9]

[illegible]

-
-
-
-
-
-
- (f) The developer is storing the user's pets in a 1-dimensional array. At each timer interval, the array is searched, using a linear search, to check if any pets' hunger or bored values are greater than 90%. If they are, an alert is displayed to the user.**
- (i) State the complexity of searching the pets in Big-O notation.**

[1]

- (ii) A given computer takes 4 milliseconds (ms) to search an array of 20 pets. Calculate an estimate of how long the computer will take to search an array of 100 pets.

Show your working.

[2]

END OF QUESTION PAPER

BLANK PAGE

BLANK PAGE

Copyright Information

OCR is committed to seeking permission to reproduce all third-party content that it uses in its assessment materials. OCR has attempted to identify and contact all copyright holders whose work is used in this paper. To avoid the issue of disclosure of answer-related information to candidates, all copyright acknowledgements are reproduced in the OCR Copyright Acknowledgements Booklet. This is produced for each series of examinations and is freely available to download from our public website (www.ocr.org.uk) after the live examination series.

If OCR has unwittingly failed to correctly acknowledge or clear any third-party content in this assessment material, OCR will be happy to correct its mistake at the earliest possible opportunity.

For queries or further information please contact the Copyright Team, First Floor, 9 Hills Road, Cambridge CB2 1GE.

OCR is part of the Cambridge Assessment Group; Cambridge Assessment is the brand name of University of Cambridge Local Examinations Syndicate (UCLES), which is itself a department of the University of Cambridge.